


SVM-PSC – Polyester resin for use in concrete

Bonded anchor with anchor rod made of galvanized steel or stainless steel of sizes M8 to M30 for use in non-cracked concrete

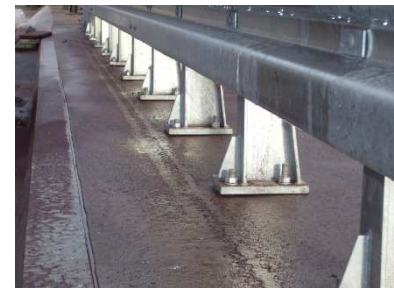

Basic product information

Features

- Several embedment depths
- ETAG 001-5 Option 7
- **STUD** – carbon steel, class 5.8 acc. EN ISO 898-1
- **STUD-88** – carbon steel, class 8.8 acc. EN ISO 898-1
Coating thickness min. 5µm acc. EN ISO 4042
- **STUD-A4** – stainless steel, grade A4-70, A4-80 acc. EN ISO 3506
Steel material 1.4401, 1.4404, 1.4571 acc. EN 10088

Substrate


- Non-cracked concrete C20/25 – C50/60
- Reinforced and unreinforced concrete
- Dry or wet concrete (Category 1)
- Flooded holes, except sea water (Category 2)

STAHL GmbH
Lutherstraße 54
73614 Schorndorf

Telefon: +49 7181 97772-0
Telefax: +49 7181 97772-22
E-Mail: info@stahl-chempower.de


www.stahl-chempower.eu

Installation guide

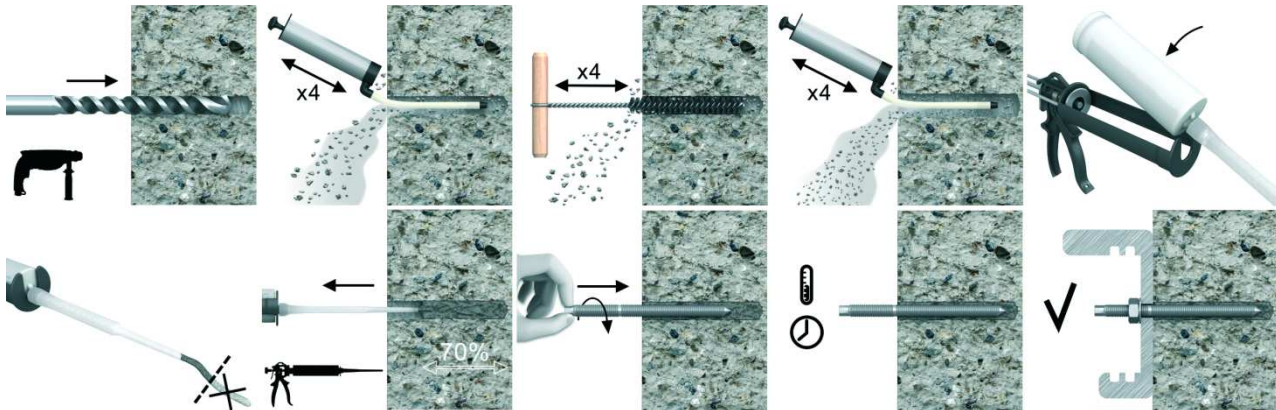

1. Drill hole to the correct diameter and depth for stud size being used.
2. Clean the hole with brush and hand pump at least four times each.
3. Insert cartridge into gun and attach nozzle.
4. Dispense to waste until an even color is obtained. Insert the mixing nozzle to the far end of the hole and inject the resin, slowly withdrawing the nozzle as the hole is filled to 70% of its depth.
5. Immediately insert the rod, slowly and with a slight twisting motion. Remove any excess resin around the hole before it sets and leave it undisturbed until the curing time elapses.
6. Attach fixture and tighten the nut to the required torque.

Installation data

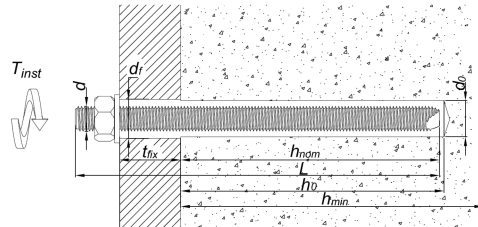

Size		M8	M10	M12	M16	M20	M24	M30	
Thread diameter	d [mm]	8	10	12	16	20	24	30	
Hole diameter in substrate	d ₀ [mm]	10	12	14	18	24	28	35	
Installation torque	T _{inst} [Nm]	10	20	40	80	120	180	300	
Wrench size	s _w [mm]	13	17	19	24	30	36	46	
Min. hole depth in substrate	h ₀ [mm]	h _{ef} + 5							
Installation depth	Min. h _{nom} [mm]	60	70	80	100	120	140	165	
	Std. h _{nom} [mm]	80	90	110	125	170	210	240	
	Max. h _{nom} [mm]	100	120	145	190	240	290	360	
Min. substrate thickness	h _{min} [mm]	h _{ef} + 30 ≥ 100				h _{ef} + 2 · d ₀			
Min. spacing	s _{min} [mm]	0.5 · h _{ef} ≥ 40							
Min. edge distance	c _{min} [mm]	0.5 · h _{ef} ≥ 40							

Minimum curing and working time

Resin temperature	Concrete temperature	Curing time*	Working time
[°C]	[°C]	[min]	[min]
5	-5	360	60
5	0	180	40
5	5	120	20
10	10	80	12
15	15	60	8
20	20	45	5
25	30	20	2

* For wet concrete the curing time must be doubled.

Mechanical properties

Size				M8	M10	M12	M16	M20	M24	M30
Nominal tensile strength	STUDS	f_{uk} [N/mm ²]		500	500	500	500	500	500	500
	STUDS-88			800	800	800	800	800	800	800
	STUDS-A4			700	700	700	700	700	700	700
Nominal yield stress	STUDS	f_{yk} [N/mm ²]		400	400	400	400	400	400	400
	STUDS-88			640	640	640	640	640	640	640
	STUDS-A4			350	350	350	350	350	350	350
Cross-sectional area		A_s [mm ²]	36.6	58.0	84.3	157.0	245.0	352.8	559.8	
Section modulus		W_{el} [mm ³]	31.2	62.3	109.2	277.5	541.0	935.0	1868.0	
Characteristic bending resistance	STUDS	M^0_{Rks} [Nm]		19	37	65	166	324	561	1124
	STUDS-88			30	60	105	266	519	898	1799
	STUDS-A4			26	52	92	233	454	786	1574
Design bending moment	STUDS	M [Nm]		11	21	37	95	185	321	642
	STUDS-88			17	34	60	152	297	513	1028
	STUDS-A4			12	24	42	107	208	360	721

Product information

Size	Product Code			Anchor		Fixture			Hole diameter	
				Thread diameter	Length	Max. thickness				
	Min.	Stand.	Max.							
	Steel class 5.8	Steel class 8.8	Steel grade A4	d	L	t _{fix,min}	t _{fix,stand}	t _{fix,max}		d _f
				[mm]	[mm]		[mm]			[mm]
M8	STUDS-08110	STUDS-08110-88	STUDS-08110-A4	8	110	40	20	-	9	
	STUDS-08160	-	STUDS-08160-A4	8	160	90	70	50	9	
M10	STUDS-10130	STUDS-10130-88	STUDS-10130-A4	10	130	48	28	-	12	
	STUDS-10170	-	STUDS-10170-A4	10	170	88	68	38	12	
	STUDS-10190	-	STUDS-10190-A4	10	190	108	88	58	12	
M12	STUDS-12160	STUDS-12160-88	STUDS-12160-A4	12	160	65	35	-	14	
	STUDS-12190	-	STUDS-12190-A4	12	190	95	65	30	14	
	STUDS-12220	-	STUDS-12220-A4	12	220	125	95	60	14	
	STUDS-12260	-	STUDS-12260-A4	12	260	165	135	100	14	
	STUDS-12300	-	STUDS-12300-A4	12	300	205	175	140	14	
M16	STUDS-16190	STUDS-16190-88	STUDS-16190-A4	16	190	71	46	-	18	
	STUDS-16220	-	STUDS-16220-A4	16	220	101	76	11	18	
	STUDS-16260	-	STUDS-16260-A4	16	260	141	116	51	18	
	STUDS-16300	-	STUDS-16300-A4	16	300	181	156	91	18	
	STUDS-16380	-	STUDS-16380-A4	16	380	261	236	171	18	
M20	STUDS-20260	STUDS-20260-88	STUDS-20260-A4	20	260	117	67	-	22	
	STUDS-20300	-	STUDS-20300-A4	20	300	157	107	37	22	
	STUDS-20350	-	STUDS-20350-A4	20	350	207	157	87	22	
M24	STUDS-24300	STUDS-24300-88	STUDS-24300-A4	24	300	132	62	-	26	
M30	STUDS-30380	STUDS-30380-88	STUDS-30380-A4	30	380	181	70	-	32	

Basic performance data for single anchor

Performance data for single anchor without influence of edge distance and spacing.

MINIMUM EMBEDMENT DEPTH – NON CRACKED CONCRETE

Size		M8	M10	M12	M16	M20	M24	M30
Embedment depth		60	70	80	100	120	140	165
MEAN ULTIMATE LOAD								
STUDS (5.8)	TENSION $N_{RU,m}$ [kN]	18.2	28.0	35.1	57.1	79.5	91.6	99.7
	SHEAR $V_{RU,m}$ [kN]	18.3	29.0	42.2	78.5	122.5	176.5	280.5
STUDS-88 (8.8)	TENSION $N_{RU,m}$ [kN]	18.2	28.0	35.1	57.1	79.5	91.6	99.7
	SHEAR $V_{RU,m}$ [kN]	29.3	46.4	67.4	125.6	196.0	282.4	448.4
STUDS-A4 (A4-70)	TENSION $N_{RU,m}$ [kN]	18.2	28.0	35.1	57.1	79.5	91.6	99.7
	SHEAR $V_{RU,m}$ [kN]	25.6	40.6	59.0	109.9	171.5	247.1	392.7
CHARACTERISTIC LOAD								
STUDS (5.8)	TENSION N_{Rk} [kN]	14.3	22.0	28.7	45.2	64.1	73.9	77.8
	SHEAR V_{Rk} [kN]	9.0	14.0	21.0	39.0	61.0	88.0	140.0
STUDS-88 (8.8)	TENSION N_{Rk} [kN]	14.3	22.0	28.7	45.2	64.1	73.9	77.8
	SHEAR V_{Rk} [kN]	15.0	23.0	34.0	63.0	98.0	141.0	224.0
STUDS-A4 (A4-70)	TENSION N_{Rk} [kN]	14.3	22.0	28.7	45.2	64.1	73.9	77.8
	SHEAR V_{Rk} [kN]	13.0	20.0	29.0	55.0	86.0	124.0	196.0
DESIGN LOAD								
STUDS (5.8)	TENSION N_{Rd} [kN]	7.9	12.2	15.9	25.1	35.6	35.2	37.1
	SHEAR V_{Rd} [kN]	7.2	11.2	16.8	31.2	48.8	70.4	112.0
STUDS-88 (8.8)	TENSION N_{Rd} [kN]	7.9	12.2	15.9	25.1	35.6	35.2	37.1
	SHEAR V_{Rd} [kN]	12.0	18.4	17.2	50.4	78.4	112.8	179.2
STUDS-A4 (A4-70)	TENSION N_{Rd} [kN]	7.9	12.2	15.9	25.1	35.6	35.2	37.1
	SHEAR V_{Rd} [kN]	8.3	12.8	18.6	35.3	55.1	79.5	125.6
RECOMMENDED LOAD*								
STUDS (5.8)	TENSION N_{Rec} [kN]	5.7	8.7	11.4	17.9	25.4	25.1	26.5
	SHEAR V_{Rec} [kN]	5.1	8.0	12.0	22.3	34.9	50.3	80.0
STUDS-88 (8.8)	TENSION N_{Rec} [kN]	5.7	8.7	11.4	17.9	25.4	25.1	26.5
	SHEAR V_{Rec} [kN]	8.6	13.1	19.4	36.0	56.0	80.6	128.0
STUDS-A4 (A4-70)	TENSION N_{Rec} [kN]	5.7	8.7	11.4	17.9	25.4	25.1	26.5
	SHEAR V_{Rec} [kN]	5.9	9.1	13.3	25.2	39.4	56.8	89.7

Steel failure

*Partial safety factor 1.4

Performance data for dry or wet concrete (Category 1)

In the area of reinforcement with ($\phi \leq 10\text{mm}$ with spacing $< 100\text{mm}$ or $\phi > 10\text{mm}$ with spacing $< 150\text{mm}$) use partial safety factor

$$\psi_{re} = 0.5 + h_{ef} / 200 \leq 1$$

STAHL GmbH
Lutherstraße 54
73614 Schorndorf

Telefon: +49 7181 97772-0
Telefax: +49 7181 97772-22
E-Mail: info@stahl-chempower.de

www.stahl-chempower.eu

Basic performance data for single anchor (cont.)

Edge distance and spacing

Edge distance (tensile)

Reduction factors for edge distance $<c_{cr,N}$ applicable to N_{Rd} or N_{rec} for non-cracked concrete

Table only valid for one edge $<c_{cr,N}$ and $s \geq s_{cr,N}$

c_N [mm]	M8		M10		M12		M16		M20	M24	M30
	$h \geq 1.20h_{min}$	h_{min}	$h \geq 1.40h_{min}$	h_{min}	$h \geq 1.45h_{min}$	h_{min}	$h \geq 1.54h_{min}$	h_{min}	h_{min}	h_{min}	h_{min}
40	0.60	0.53	0.56	0.50	0.53	0.50	-	-	-	-	-
50	0.65	0.58	0.62	0.54	0.58	0.54	0.53	0.50	-	-	-
60	0.71	0.63	0.68	0.59	0.64	0.58	0.57	0.53	0.53	-	-
70	0.77	0.68	0.75	0.63	0.69	0.63	0.62	0.57	0.57	0.53	-
85	0.87	0.77	0.85	0.70	0.78	0.70	0.68	0.62	0.62	0.58	0.54
90	0.90	0.80	0.89	0.72	0.81	0.72	0.70	0.64	0.64	0.59	0.55
105	0.96	0.85	1.00	0.80	0.90	0.80	0.77	0.69	0.69	0.64	0.59
120	1.00	0.90	-	0.84	1.00	0.88	0.85	0.75	0.75	0.68	0.63
150	-	1.00	-	0.93	-	0.97	1.00	0.88	0.87	0.78	0.71
165	-	-	-	0.97	-	1.00	-	0.91	0.93	0.84	0.75
180	-	-	-	1.00	-	-	-	0.95	1.00	0.89	0.79
210	-	-	-	-	-	-	-	1.00	-	1.00	0.88
250	-	-	-	-	-	-	-	-	-	-	1.00

Basic performance data for single anchor (cont.)

Edge distance (shear)

Increasing factors for edge distance $>c_{min}$ applicable to $V_{Rd,c}$ for non-cracked concrete

Tables only valid for one edge $>c_{min}$ and $s \geq 3c_v$

C_v [mm]	M8		M10		M12		M16		M20		M24		M30	
	$h \geq 1.5c_v$	h_{min}	$h \geq 1.5c_v$	h_{min}	$h \geq 1.5c_v$	h_{min}	$h \geq 1.5c_v$	h_{min}	$h \geq 1.5c_v$	h_{min}	$h \geq 1.5c_v$	h_{min}	$h \geq 1.5c_v$	h_{min}
40	1.00	1.00	1.00	1.00	1.00	1.00	-	-	-	-	-	-	-	-
50	1.40	1.40	1.40	1.40	1.40	1.40	1.00	1.00	-	-	-	-	-	-
60	1.84	1.84	1.84	1.84	1.84	1.84	1.31	1.31	1.00	1.00	-	-	-	-
70	2.32	2.26	2.32	2.26	2.32	2.32	1.66	1.66	1.26	1.26	1.00	1.00	-	-
83	2.99	2.68	2.99	2.68	2.99	2.81	2.14	2.14	1.63	1.63	1.29	1.29	1.00	1.00
90	3.38	2.90	3.38	2.90	3.38	3.05	2.41	2.37	1.84	1.84	1.46	1.46	1.13	1.13
100	3.95	3.53	3.95	3.23	3.95	3.39	2.83	2.63	2.15	2.15	1.71	1.71	1.32	1.32
120	-	3.87	5.20	3.87	5.20	4.06	3.72	3.16	2.83	2.73	2.24	2.24	1.74	1.74
150	-	-	-	4.84	7.26	5.08	5.20	3.95	3.95	3.42	3.14	2.93	2.43	2.43
165	-	-	-	5.33	8.38	5.59	5.99	4.34	4.56	3.76	3.62	3.22	2.80	2.73
180	-	-	-	5.81	-	6.09	6.83	4.74	5.20	4.10	4.12	3.51	3.19	2.98
210	-	-	-	-	-	7.11	8.61	5.53	6.55	4.78	5.20	4.10	4.02	3.48
250	-	-	-	-	-	8.46	11.18	6.58	8.51	5.69	6.75	4.88	5.23	4.14
300	-	-	-	-	-	-	-	7.90	-	6.83	8.87	5.86	6.87	4.97
350	-	-	-	-	-	-	-	9.22	-	7.97	-	6.83	8.66	5.79
400	-	-	-	-	-	-	-	10.53	-	-	-	7.81	10.58	6.62
450	-	-	-	-	-	-	-	-	-	-	-	8.78	-	7.45
500	-	-	-	-	-	-	-	-	-	-	-	-	-	8.28
550	-	-	-	-	-	-	-	-	-	-	-	-	-	9.10
600	-	-	-	-	-	-	-	-	-	-	-	-	-	9.93

Basic performance data for single anchor (cont.)

Spacing

Reduction factors for spacing $s < s_{cr,N}$ applicable to N_{Rd}/V_{Rd} or N_{rec}/V_{rec} for non-cracked concrete

Table only valid for one spacing $s < s_{cr,N}$ and $c \geq c_{cr,N}$

s [mm]	M8		M10		M12		M16		M20	M24	M30
	$h \geq 1.20h_{min}$	h_{min}	$h \geq 1.40h_{min}$	h_{min}	$h \geq 1.45h_{min}$	h_{min}	$h \geq 1.54h_{min}$	h_{min}	h_{min}	h_{min}	h_{min}
40	0.61	0.57	0.60	0.56	0.58	0.56	-	-	-	-	-
50	0.64	0.58	0.62	0.57	0.60	0.58	0.58	0.56	-	-	-
60	0.67	0.60	0.64	0.59	0.63	0.59	0.60	0.58	0.58	-	-
70	0.69	0.62	0.67	0.60	0.65	0.61	0.62	0.59	0.60	0.58	-
85	0.72	0.64	0.70	0.62	0.68	0.63	0.64	0.61	0.62	0.60	0.59
100	0.75	0.67	0.74	0.64	0.71	0.66	0.67	0.63	0.64	0.62	0.60
125	0.80	0.71	0.80	0.68	0.76	0.70	0.71	0.66	0.67	0.65	0.63
150	0.85	0.75	0.86	0.71	0.81	0.73	0.75	0.69	0.71	0.68	0.65
180	0.90	0.80	0.93	0.76	0.88	0.78	0.80	0.73	0.75	0.71	0.68
200	0.94	0.83	0.98	0.79	0.92	0.81	0.83	0.75	0.78	0.74	0.70
225	0.99	0.88	1.00	0.82	0.97	0.85	0.88	0.78	0.81	0.77	0.73
250	1.00	0.92	-	0.86	1.00	0.89	0.92	0.81	0.85	0.80	0.75
275	-	0.96	-	0.89	-	0.93	0.96	0.84	0.88	0.83	0.78
300	-	1.00	-	0.93	-	0.97	1.00	0.88	0.92	0.86	0.80
325	-	-	-	0.96	-	1.00	-	0.91	0.95	0.89	0.83
360	-	-	-	1.00	-	-	-	0.95	1.00	0.93	0.86
400	-	-	-	-	-	-	-	1.00	-	0.98	0.90
440	-	-	-	-	-	-	-	-	-	1.00	0.94
500	-	-	-	-	-	-	-	-	-	-	1.00

Basic performance data for single anchor (cont.)

Performance data for single anchor without influence of edge distance and spacing.

STANDARD EMBEDMENT DEPTH – NON CRACKED CONCRETE

Size		M8	M10	M12	M16	M20	M24	M30
Embedment depth		80	90	110	125	170	210	240
MEAN ULTIMATE LOAD								
STUDS (5.8)	TENSION $N_{RU,m}$ [kN]	21.6	34.8	48.3	82.9	119.3	132.4	157.1
	SHEAR $V_{RU,m}$ [kN]	18.3	29.0	42.2	78.5	122.5	176.5	280.5
STUDS-88 (8.8)	TENSION $N_{RU,m}$ [kN]	22.7	38.0	48.3	82.9	119.3	132.4	157.1
	SHEAR $V_{RU,m}$ [kN]	29.3	46.4	67.4	125.6	196.0	282.4	448.4
STUDS-A4 (A4-70)	TENSION $N_{RU,m}$ [kN]	22.7	38.0	48.3	82.9	119.3	132.4	157.1
	SHEAR $V_{RU,m}$ [kN]	25.6	40.6	59.0	109.9	171.5	247.1	392.7
CHARACTERISTIC LOAD								
STUDS (5.8)	TENSION N_{Rk} [kN]	18.0	28.3	39.4	56.5	90.8	110.8	113.1
	SHEAR V_{Rk} [kN]	9.0	14.0	21.0	39.0	61.0	88.0	140.0
STUDS-88 (8.8)	TENSION N_{Rk} [kN]	19.1	28.3	39.4	56.5	90.8	110.8	113.1
	SHEAR V_{Rk} [kN]	15.0	23.0	34.0	63.0	98.0	141.0	224.0
STUDS-A4 (A4-70)	TENSION N_{Rk} [kN]	19.1	28.3	39.4	56.5	90.8	110.8	113.1
	SHEAR V_{Rk} [kN]	13.0	20.0	29.0	55.0	86.0	124.0	196.0
DESIGN LOAD								
STUDS (5.8)	TENSION N_{Rd} [kN]	10.6	15.7	21.9	31.4	50.4	52.8	53.9
	SHEAR V_{Rd} [kN]	7.2	11.2	16.8	31.2	48.8	70.4	112.0
STUDS-88 (8.8)	TENSION N_{Rd} [kN]	10.6	15.7	21.9	31.4	50.4	52.8	53.9
	SHEAR V_{Rd} [kN]	12.0	18.4	17.2	50.4	78.4	112.8	179.2
STUDS-A4 (A4-70)	TENSION N_{Rd} [kN]	10.6	15.7	21.9	31.4	50.4	52.8	53.9
	SHEAR V_{Rd} [kN]	8.3	12.8	18.6	35.3	55.1	79.5	125.6
RECOMMENDED LOAD*								
STUDS (5.8)	TENSION N_{Rec} [kN]	7.6	11.2	15.6	22.4	36.0	37.7	38.5
	SHEAR V_{Rec} [kN]	5.1	8.0	12.0	22.3	34.9	50.3	80.0
STUDS-88 (8.8)	TENSION N_{Rec} [kN]	7.6	11.2	15.6	22.4	36.0	37.7	38.5
	SHEAR V_{Rec} [kN]	8.6	13.1	19.4	36.0	56.0	80.6	128.0
STUDS-A4 (A4-70)	TENSION N_{Rec} [kN]	7.6	11.2	15.6	22.4	36.0	37.7	38.5
	SHEAR V_{Rec} [kN]	5.9	9.1	13.3	25.2	39.4	56.8	89.7

Steel failure

*Partial safety factor 1.4

Performance data for dry or wet concrete (Category 1) and flooded holes, except sea water (Category 2)

In the area of reinforcement with ($\phi \leq 10\text{mm}$ with spacing $< 100\text{mm}$ or $\phi > 10\text{mm}$ with spacing $< 150\text{mm}$) use partial safety factor

$$\psi_{re} = 0.5 + h_{ef} / 200 \leq 1$$

STAHL GmbH
Lutherstraße 54
73614 Schorndorf

Telefon: +49 7181 97772-0
Telefax: +49 7181 97772-22
E-Mail: info@stahl-chempower.de

www.stahl-chempower.eu

Basic performance data for single anchor (cont.)

Edge distance and spacing

Edge distance (tensile)

Reduction factors for edge distance $<c_{cr,N}$ applicable to N_{Rd} or N_{rec} for non-cracked concrete

Table only valid for one edge $<c_{cr,N}$ and $s \geq s_{cr,N}$

c_N [mm]	M8		M10		M12		M16		M20		M24		M30	
	$h \geq 1.45 h_{min}$	h_{min}	$h \geq 1.50 h_{min}$	h_{min}	$h \geq 1.57 h_{min}$	h_{min}	$h \geq 1.61 h_{min}$	h_{min}	$h \geq 1.56 h_{min}$	h_{min}	$h \geq 1.58 h_{min}$	h_{min}	$h \geq 1.55 h_{min}$	h_{min}
40	0.60	0.50	-	-	-	-	-	-	-	-	-	-	-	-
45	0.64	0.52	0.57	0.49	-	-	-	-	-	-	-	-	-	-
55	0.71	0.56	0.62	0.52	0.58	0.51	-	-	-	-	-	-	-	-
63	0.77	0.60	0.67	0.55	0.62	0.54	0.55	0.51	-	-	-	-	-	-
85	0.90	0.70	0.80	0.63	0.72	0.62	0.63	0.57	0.57	0.55	-	-	-	-
105	0.98	0.76	0.93	0.71	0.83	0.69	0.70	0.62	0.63	0.60	0.61	0.56	-	-
120	1.00	0.80	1.00	0.77	0.91	0.75	0.76	0.67	0.68	0.64	0.65	0.59	0.63	0.56
140	-	0.85	-	0.81	1.00	0.82	0.85	0.73	0.74	0.69	0.71	0.64	0.68	0.61
165	-	0.91	-	0.87	-	0.88	0.95	0.82	0.83	0.77	0.78	0.70	0.75	0.66
180	-	0.95	-	0.90	-	0.91	1.00	0.86	0.88	0.81	0.83	0.73	0.80	0.69
200	-	1.00	-	0.94	-	0.95	-	0.90	0.95	0.88	0.89	0.78	0.86	0.73
225	-	-	-	1.00	-	1.00	-	0.95	1.00	0.94	0.98	0.85	0.94	0.79
265	-	-	-	-	-	-	-	1.00	-	1.00	1.00	0.92	1.00	0.87
300	-	-	-	-	-	-	-	-	-	-	-	0.98	-	0.92
320	-	-	-	-	-	-	-	-	-	-	-	1.00	-	0.94
360	-	-	-	-	-	-	-	-	-	-	-	-	-	1.00

Basic performance data for single anchor (cont.)

Edge distance (shear)

Increasing factors for edge distance $>c_{\min}$ applicable to $V_{Rd,c}$ for non-cracked concrete

Tables only valid for one edge $>c_{\min}$ and $s \geq 3c_v$

c_v [mm]	M8		M10		M12		M16		M20		M24		M30	
	$h \geq 1.5c_v$	h_{\min}	$h \geq 1.5c_v$	h_{\min}	$h \geq 1.5c_v$	h_{\min}	$h \geq 1.5c_v$	h_{\min}	$h \geq 1.5c_v$	h_{\min}	$h \geq 1.5c_v$	h_{\min}	$h \geq 1.5c_v$	h_{\min}
40	1.00	1.00	-	-	-	-	-	-	-	-	-	-	-	-
45	1.19	1.19	1.00	1.00	-	-	-	-	-	-	-	-	-	-
55	1.61	1.61	1.35	1.35	1.00	1.00	-	-	-	-	-	-	-	-
63	1.98	1.98	1.66	1.66	1.23	1.23	1.00	1.00	-	-	-	-	-	-
85	3.10	2.88	2.60	2.52	1.92	1.92	1.57	1.57	1.00	1.00	-	-	-	-
105	4.25	3.55	3.56	3.11	2.64	2.49	2.15	2.13	1.37	1.37	1.00	1.00	-	-
120	-	4.06	4.35	3.56	3.22	2.84	2.63	2.44	1.68	1.68	1.22	1.22	1.00	1.00
150	-	-	-	4.44	4.50	3.55	3.67	3.05	2.34	2.31	1.71	1.71	1.40	1.40
180	-	-	-	-	5.92	4.26	4.83	3.66	3.08	2.77	2.24	2.23	1.84	1.84
225	-	-	-	-	-	5.33	6.75	4.57	4.31	3.46	3.14	2.78	2.57	2.46
250	-	-	-	-	-	-	7.90	5.08	5.04	3.85	3.67	3.09	3.01	2.73
300	-	-	-	-	-	-	-	6.10	-	4.62	4.83	3.71	3.95	3.28
350	-	-	-	-	-	-	-	7.12	-	-	-	4.33	4.98	3.83
400	-	-	-	-	-	-	-	-	-	-	-	4.95	6.09	4.37
450	-	-	-	-	-	-	-	-	-	-	-	-	-	4.92
500	-	-	-	-	-	-	-	-	-	-	-	-	-	5.47
550	-	-	-	-	-	-	-	-	-	-	-	-	-	6.01

Basic performance data for single anchor (cont.)

Spacing

Reduction factors for spacing $< s_{cr,N}$ applicable to N_{Rd}/V_{Rd} or N_{rec}/V_{rec} for non-cracked concrete

Table only valid for one spacing $< s_{cr,N}$ and $c \geq c_{cr,N}$

S [mm]	M8		M10		M12		M16		M20		M24		M30	
	$h \geq 1.45 h_{min}$	h_{min}	$h \geq 1.50 h_{min}$	h_{min}	$h \geq 1.57 h_{min}$	h_{min}	$h \geq 1.61 h_{min}$	h_{min}	$h \geq 1.56 h_{min}$	h_{min}	$h \geq 1.58 h_{min}$	h_{min}	$h \geq 1.55 h_{min}$	h_{min}
40	0.61	0.55	-	-	-	-	-	-	-	-	-	-	-	-
45	0.62	0.56	0.60	0.55	-	-	-	-	-	-	-	-	-	-
55	0.65	0.57	0.62	0.56	0.60	0.56	-	-	-	-	-	-	-	-
63	0.67	0.58	0.64	0.57	0.62	0.57	0.58	0.56	-	-	-	-	-	-
85	0.74	0.61	0.68	0.59	0.66	0.60	0.62	0.59	0.60	0.58	-	-	-	-
105	0.79	0.63	0.73	0.62	0.69	0.62	0.65	0.61	0.62	0.60	0.61	0.58	-	-
120	0.83	0.65	0.76	0.63	0.72	0.64	0.67	0.62	0.64	0.62	0.63	0.60	0.62	0.58
150	0.88	0.69	0.82	0.67	0.78	0.67	0.71	0.65	0.68	0.65	0.66	0.62	0.65	0.60
180	0.93	0.73	0.89	0.70	0.83	0.70	0.76	0.68	0.71	0.68	0.69	0.64	0.68	0.63
200	0.96	0.75	0.93	0.72	0.87	0.73	0.79	0.70	0.73	0.70	0.72	0.66	0.70	0.64
225	1.00	0.78	0.98	0.75	0.92	0.76	0.82	0.73	0.76	0.72	0.74	0.68	0.73	0.66
280	-	0.85	1.00	0.81	1.00	0.82	0.90	0.78	0.83	0.77	0.80	0.72	0.79	0.69
320	-	0.90	-	0.86	-	0.86	0.96	0.82	0.88	0.81	0.85	0.75	0.83	0.72
400	-	1.00	-	0.94	-	0.95	1.00	0.90	0.97	0.89	0.93	0.82	0.91	0.78
450	-	-	-	1.00	-	1.00	-	0.95	1.00	0.94	0.99	0.86	0.96	0.81
500	-	-	-	-	-	-	-	1.00	-	0.99	1.00	0.90	1.00	0.85
550	-	-	-	-	-	-	-	-	-	1.00	-	0.94	-	0.88
630	-	-	-	-	-	-	-	-	-	-	-	1.00	-	0.94
760	-	-	-	-	-	-	-	-	-	-	-	-	-	1.00

Basic performance data for single anchor (cont.)

Performance data for single anchor without influence of edge distance and spacing.

MAXIMUM EMBEDMENT DEPTH – NON CRACKED CONCRETE

Size		M8	M10	M12	M16	M20	M24	M30
Embedment depth		100	120	145	190	240	290	360
MEAN ULTIMATE LOAD								
STUDS (5.8)	TENSION $N_{RU,m}$ [kN]	21.6	34.8	50.4	93.8	146.7	189.8	217.6
	SHEAR $V_{RU,m}$ [kN]	18.3	29.0	42.2	78.5	122.5	176.5	280.5
STUDS-88 (8.8)	TENSION $N_{RU,m}$ [kN]	30.3	48.0	63.6	108.6	159.1	189.8	217.6
	SHEAR $V_{RU,m}$ [kN]	29.3	46.4	67.4	125.6	196.0	282.4	448.4
STUDS-A4 (A4-70)	TENSION $N_{RU,m}$ [kN]	30.3	48.0	63.6	108.6	159.1	189.8	217.6
	SHEAR $V_{RU,m}$ [kN]	25.6	40.6	59.0	109.9	171.5	247.1	392.7
CHARACTERISTIC LOAD								
STUDS (5.8)	TENSION N_{Rk} [kN]	18.0	29.0	42.0	78.0	122.0	153.1	169.6
	SHEAR V_{Rk} [kN]	9.0	14.0	21.0	39.0	61.0	88.0	140.0
STUDS-88 (8.8)	TENSION N_{Rk} [kN]	23.9	37.7	51.9	86.0	128.2	153.1	169.6
	SHEAR V_{Rk} [kN]	15.0	23.0	34.0	63.0	98.0	141.0	224.0
STUDS-A4 (A4-70)	TENSION N_{Rk} [kN]	23.9	37.7	51.9	86.0	128.2	153.1	169.6
	SHEAR V_{Rk} [kN]	13.0	20.0	29.0	55.0	86.0	124.0	196.0
DESIGN LOAD								
STUDS (5.8)	TENSION N_{Rd} [kN]	12.0	19.3	28.0	47.8	71.2	72.9	80.8
	SHEAR V_{Rd} [kN]	7.2	11.2	16.8	31.2	48.8	70.4	112.0
STUDS-88 (8.8)	TENSION N_{Rd} [kN]	13.3	20.9	28.8	47.8	71.2	72.9	80.8
	SHEAR V_{Rd} [kN]	12.0	18.4	17.2	50.4	78.4	112.8	179.2
STUDS-A4 (A4-70)	TENSION N_{Rd} [kN]	13.3	20.9	28.8	47.8	71.2	72.9	80.8
	SHEAR V_{Rd} [kN]	8.3	12.8	18.6	35.3	55.1	79.5	125.6
RECOMMENDED LOAD*								
STUDS (5.8)	TENSION N_{Rec} [kN]	8.6	13.8	20.0	34.1	50.9	52.1	57.7
	SHEAR V_{Rec} [kN]	5.1	8.0	12.0	22.3	34.9	50.3	80.0
STUDS-88 (8.8)	TENSION N_{Rec} [kN]	9.5	14.9	20.6	34.1	50.9	52.1	57.7
	SHEAR V_{Rec} [kN]	8.6	13.1	19.4	36.0	56.0	80.6	128.0
STUDS-A4 (A4-70)	TENSION N_{Rec} [kN]	9.5	14.9	20.6	34.1	50.9	52.1	57.7
	SHEAR V_{Rec} [kN]	5.9	9.1	13.3	25.2	39.4	56.8	89.7

Steel failure

*Partial safety factor 1.4

Performance data for dry or wet concrete (Category 1) and flooded holes, except sea water (Category 2)

In the area of reinforcement with ($\phi \leq 10\text{mm}$ with spacing $< 100\text{mm}$ or $\phi > 10\text{mm}$ with spacing $< 150\text{mm}$) use partial safety factor

$$\psi_{re} = 0.5 + h_{ef} / 200 \leq 1$$

STAHL GmbH
Lutherstraße 54
73614 Schorndorf

Telefon: +49 7181 97772-0
Telefax: +49 7181 97772-22
E-Mail: info@stahl-chempower.de

www.stahl-chempower.eu

Basic performance data for single anchor (cont.)

Edge distance and spacing

Edge distance (tensile)

Reduction factors for edge distance $<c_{cr,N}$ applicable to N_{Rd} or N_{rec} for non-cracked concrete

Table only valid for one edge $<c_{cr,N}$ and $s \geq s_{cr,N}$

C_N [mm]	M8		M10		M12		M16		M20		M24		M30	
	$h \geq 1.54 h_{min}$	h_{min}	$h \geq 1.60 h_{min}$	h_{min}	$h \geq 1.66 h_{min}$	h_{min}	$h \geq 1.73 h_{min}$	h_{min}	$h \geq 1.67 h_{min}$	h_{min}	$h \geq 1.68 h_{min}$	h_{min}	$h \geq 1.67 h_{min}$	h_{min}
50	0.67	0.52	-	-	-	-	-	-	-	-	-	-	-	-
60	0.74	0.56	0.65	0.51	-	-	-	-	-	-	-	-	-	-
73	0.81	0.61	0.73	0.55	0.66	0.54	-	-	-	-	-	-	-	-
95	0.92	0.69	0.85	0.62	0.78	0.60	0.67	0.54	-	-	-	-	-	-
100	0.93	0.70	0.88	0.64	0.80	0.62	0.68	0.55	-	-	-	-	-	-
120	0.99	0.74	0.96	0.70	0.91	0.68	0.76	0.60	0.68	0.58	-	-	-	-
140	1.00	0.78	1.00	0.73	1.00	0.74	0.85	0.64	0.74	0.62	-	-	-	-
145	-	0.79	-	0.74	-	0.75	0.87	0.65	0.76	0.63	0.78	0.59	-	-
165	-	0.83	-	0.78	-	0.78	0.95	0.70	0.83	0.68	0.83	0.63	-	-
180	-	0.86	-	0.80	-	0.81	1.00	0.74	0.88	0.72	0.89	0.66	0.80	0.61
200	-	0.90	-	0.83	-	0.84	-	0.76	0.95	0.76	0.98	0.70	0.86	0.65
225	-	0.95	-	0.88	-	0.89	-	0.80	1.00	0.81	1.00	0.75	0.94	0.69
250	-	1.00	-	0.92	-	0.93	-	0.83	-	0.85	-	0.79	1.00	0.73
300	-	-	-	1.00	-	1.00	-	0.89	-	0.92	-	0.84	-	0.78
360	-	-	-	-	-	-	-	0.97	-	1.00	-	0.91	-	0.83
400	-	-	-	-	-	-	-	1.00	-	-	-	0.96	-	0.87
450	-	-	-	-	-	-	-	-	-	-	-	1.00	-	0.92
550	-	-	-	-	-	-	-	-	-	-	-	-	-	1.00

Basic performance data for single anchor (cont.)

Edge distance (shear)

Increasing factors for edge distance $>c_{min}$ applicable to $V_{Rd,c}$ for non-cracked concrete

Tables only valid for one edge $>c_{min}$ and $s \geq 3c_v$

c_v [mm]	M8		M10		M12		M16		M20		M24		M30	
	$h \geq 1.5c_v$	h_{min}	$h \geq 1.5c_v$	h_{min}	$h \geq 1.5c_v$	h_{min}	$h \geq 1.5c_v$	h_{min}	$h \geq 1.5c_v$	h_{min}	$h \geq 1.5c_v$	h_{min}	$h \geq 1.5c_v$	h_{min}
50	1.00	1.00	-	-	-	-	-	-	-	-	-	-	-	-
60	1.31	1.31	1.00	1.00	-	-	-	-	-	-	-	-	-	-
73	1.76	1.76	1.34	1.34	1.00	1.00	-	-	-	-	-	-	-	-
95	2.62	2.50	1.99	1.99	1.48	1.48	1.00	1.00	-	-	-	-	-	-
100	2.83	2.63	2.15	2.15	1.60	1.60	1.08	1.08	-	-	-	-	-	-
105	-	2.76	2.32	2.26	1.73	1.73	1.16	1.16	-	-	-	-	-	-
120	-	-	2.83	2.58	2.11	2.08	1.42	1.42	1.00	1.00	-	-	-	-
145	-	-	3.76	3.12	2.80	2.51	1.89	1.89	1.33	1.33	1.00	1.00	-	-
180	-	-	-	3.87	3.87	3.12	2.61	2.35	1.84	1.84	1.38	1.38	1.00	1.00
200	-	-	-	-	-	3.46	3.05	2.62	2.15	2.11	1.62	1.62	1.17	1.17
230	-	-	-	-	-	-	3.77	3.01	2.65	2.42	2.00	2.00	1.44	1.44
250	-	-	-	-	-	-	-	3.27	-	2.64	2.26	2.17	1.64	1.64
300	-	-	-	-	-	-	-	3.92	-	-	2.98	2.61	2.15	2.10
350	-	-	-	-	-	-	-	-	-	-	-	3.04	2.71	2.45
400	-	-	-	-	-	-	-	-	-	-	-	-	3.31	2.80
450	-	-	-	-	-	-	-	-	-	-	-	-	-	3.15

Basic performance data for single anchor (cont.)

Spacing

Reduction factors for spacing $< s_{cr,N}$ applicable to N_{Rd}/V_{Rd} or N_{rec}/V_{rec} for non-cracked concrete

Table only valid for one spacing $< s_{cr,N}$ and $c \geq c_{cr,N}$

S [mm]	M8		M10		M12		M16		M20		M24		M30	
	$h \geq 1.54 h_{min}$	h_{min}	$h \geq 1.60 h_{min}$	h_{min}	$h \geq 1.66 h_{min}$	h_{min}	$h \geq 1.73 h_{min}$	h_{min}	$h \geq 1.67 h_{min}$	h_{min}	$h \geq 1.68 h_{min}$	h_{min}	$h \geq 1.67 h_{min}$	h_{min}
50	0.64	0.55	-	-	-	-	-	-	-	-	-	-	-	-
60	0.67	0.56	0.63	0.55	-	-	-	-	-	-	-	-	-	-
73	0.70	0.57	0.66	0.56	0.64	0.56	-	-	-	-	-	-	-	-
95	0.76	0.60	0.71	0.58	0.68	0.58	0.64	0.56	-	-	-	-	-	-
100	0.78	0.60	0.72	0.58	0.69	0.59	0.64	0.57	-	-	-	-	-	-
120	0.83	0.62	0.76	0.60	0.72	0.60	0.67	0.58	0.64	0.58	-	-	-	-
145	0.86	0.65	0.81	0.62	0.77	0.63	0.71	0.60	0.67	0.60	0.66	0.58	-	-
180	0.91	0.68	0.89	0.65	0.83	0.66	0.76	0.62	0.71	0.63	0.69	0.60	0.68	0.58
200	0.93	0.70	0.91	0.67	0.87	0.67	0.79	0.63	0.73	0.64	0.72	0.61	0.70	0.59
225	0.97	0.73	0.94	0.69	0.92	0.69	0.82	0.65	0.76	0.66	0.74	0.63	0.73	0.60
250	1.00	0.75	0.97	0.71	0.96	0.72	0.86	0.66	0.79	0.67	0.77	0.64	0.76	0.62
280	-	0.78	1.00	0.73	1.00	0.74	0.90	0.68	0.83	0.69	0.80	0.66	0.79	0.63
320	-	0.82	-	0.77	-	0.78	0.96	0.71	0.88	0.72	0.85	0.68	0.83	0.65
400	-	0.90	-	0.83	-	0.84	1.00	0.76	0.97	0.78	0.93	0.73	0.91	0.69
450	-	0.95	-	0.88	-	0.89	-	0.80	1.00	0.81	0.99	0.76	0.96	0.71
500	-	1.00	-	0.92	-	0.93	-	0.83	-	0.85	1.00	0.79	1.00	0.73
550	-	-	-	0.96	-	0.97	-	0.86	-	0.88	-	0.82	-	0.75
630	-	-	-	1.00	-	1.00	-	0.91	-	0.94	-	0.86	-	0.79
760	-	-	-	-	-	-	-	1.00	-	1.00	-	0.94	-	0.85
950	-	-	-	-	-	-	-	-	-	-	-	1.00	-	0.94
1100	-	-	-	-	-	-	-	-	-	-	-	-	-	1.00


Design performance data for group of anchors

Size			M8	M10	M12	M16	M20	M24	M30	
TENSION LOAD										
STEEL FAILURE (TR 029, 5.2.2.2)										
Steel class 5.8										
Characteristic resistance	N_{Rks}	[kN]	18.0	29.0	42.0	78.0	122.0	176.0	280.0	
Partial safety factor	γ_{Ms}	-	1.5							
Steel class 8.8										
Characteristic resistance	N_{Rks}	[kN]	29.0	46.0	67.0	126.0	196.0	282.0	449.0	
Partial safety factor	γ_{Ms}	-	1.5							
Steel class A4-70										
Characteristic resistance	N_{Rks}	[kN]	26.0	41.0	59.0	110.0	171.0	247.0	393.0	
Partial safety factor	γ_{Ms}	-	1.87							
PULL-OUT FAILURE (acc.TR 029, 5.2.2.3)										
NON-CRACKED CONCRETE C20/25 (CHARACTERISTIC RESISTANCE ACC. 5.2a $N_{Rk,p}^0 = \pi \cdot d \cdot h_{ef} \cdot \tau_{Rk}$)										
Characteristic bond resistance (Temp range I 40°C/24°C)	$\tau_{Rk,ucr}$	[N/mm ²]	9.5	10.0	9.5	9.0	8.5	7.0	5.0	
Characteristic bond resistance (Temp range II 80°C/50°C)	$\tau_{Rk,ucr}$	[N/mm ²]	8.5	9.0	8.5	8.0	7.5	6.0	4.5	
Partial safety factor for use category 1 + 2	γ_{Mp}	-	1.8					2.1		
Increasing factors for τ_{ucr}	C30/37	ψ_c	-	1.11	1.08	1.08	1.08	1.08	1.00	1.00
	C40/50	ψ_c	-	1.15	1.15	1.15	1.15	1.15	1.00	1.00
	C50/60	ψ_c	-	1.19	1.19	1.19	1.19	1.19	1.00	1.00
CONCRETE CONE FAILURE (acc.TR 029, 5.2.2.4)										
Effective embedment depth	Min h_{ef}	[mm]	60	70	80	100	120	140	165	
	Max h_{ef}	[mm]	100	120	145	190	240	290	360	
Partial safety factor for use category 1 + 2*	γ_{Mc}	-	1.8					2.1		
CONCRETE SPLITTING FAILURE (acc.TR 029, 5.2.2.6)										
Effective embedment depth	Min h_{ef}	[mm]	60	70	80	100	120	140	165	
	Max h_{ef}	[mm]	100	120	145	190	240	290	360	
Edge distance	$h = h_{min}$	$c_{cr,sp}$	[mm]	$2.5 \cdot h_{ef}$		$2.0 \cdot h_{ef}$		$1.5 \cdot h_{ef}$		
	$h_{min} < h < 2 \cdot h_{ef}$	$c_{cr,sp}$	[mm]	From linear interpolation (drawing 1)						
	$h \geq 2 \cdot h_{ef}$	$c_{cr,sp}$	[mm]	$c_{cr,Np}$						
Spacing	$S_{cr,sp}$	[mm]	$2.0 \cdot c_{cr,sp}$							
Partial safety factor for use category 1 + 2*	γ_{Mc}	-	1.8					2.1		

Design performance data for group of anchors

Size			M8	M10	M12	M16	M20	M24	M30
SHEAR LOAD									
STEEL FAILURE (TR 029, 5.2.3.2)									
Steel class 5.8 Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	9.0	14.0	21.0	39.0	61.0	88.0	140.0
Steel class 5.8 Characteristic resistance with lever arm	$M^0_{Rk,s}$	[Nm]	19.0	37.0	65.0	166.0	324.0	561.0	1124.0
Partial safety factor	γ_{Ms}	-	1.25						
Steel class 8.8 Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	15.0	23.0	34.0	63.0	98.0	141.0	224.0
Steel class 8.8 Characteristic resistance with lever arm	$M^0_{Rk,s}$	[Nm]	30.0	60.0	105.0	266.0	519.0	898.0	1799.0
Partial safety factor	γ_{Ms}	-	1.25						
Steel class A4-70 Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	13.0	20.0	29.0	55.0	86.0	124.0	196.0
Steel class A4-70 Characteristic resistance with lever arm	$M^0_{Rk,s}$	[Nm]	26.0	52.0	92.0	233.0	454.0	786.0	1574.0
Partial safety factor	γ_{Ms}	-	1.56						
PRYOUT FAILURE (TR 029 5.2.3.3)									
Factor	k	-	2	2	2	2	2	2	2
Partial safety factor	γ_{Ms}	-	1.5						
CONCRETE EDGE FAILURE (TR 029 5.2.3.4)									
Diameter	d	[kN]	8	10	12	16	20	24	30
Effective embedment depth	Min h_{ef}	[mm]	60	70	80	100	120	140	165
	Max h_{ef}	[mm]	100	120	145	190	240	290	360
Partial safety factor	γ_{Mc}	-	1.5						

* Use category: 1 – dry or wet concrete; 2 – flooded holes

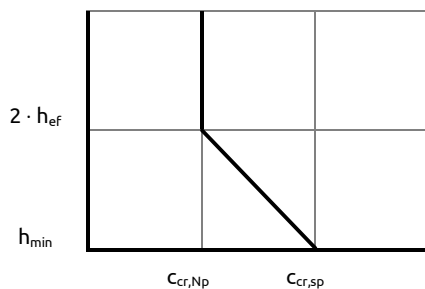

Drawing 1. Curve to determination of $c_{cr,sp}$ in case when $h_{min} < h < 2 \cdot h_{ef}$